

AM Deactivator XAMD-1



Cross Point AM Deactivator XAMD-1 is a stand-alone combined label detector and label deactivator, designed for reliable detection and deactivation of AM labels.

Deactivation occurs automatically after a label is presented. After deactivation, a green light and buzzer notify the user about a successful deactivation. A red light and buzzer notify the user about a failed deactivation.

The optional notification box can easily be connected to the deactivator unit through its extension cable. The notification box also contains a green and red LED and a buzzer and will provide the visual and audible notifications. Furthermore, it is equipped with a key switch, which allows store employees to disable deactivation in those moments that employees are not present at the cash desk. This to avoid unauthorised deactivation by non-store employees or to use the deactivator as a Double Checker.

The AM Deactivator XAMD-1 is designed to be mounted recessed in the desktop. Its small height and smooth surface provide easy and non-obstructed deactivation of secured items. The optional notification box can be applied to provide the necessary deactivation feedback.

Unique features


Quick and smooth deactivation

Distinction between successful and failed deactivations

Automatic synchronization with other AM systems

Tag in field detection

Optional external notification box, Double Checker option

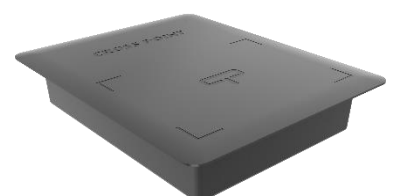

AM Deactivator XAMD-1

Features

AM Deactivator XAMD-1

| | |
|---|---|
| Detection before deactivation | ● |
| Adjustable detection distance | ● |
| Distinction between successful and failed deactivations with LED indication | ● |
| Tag in field detection | ● |
| Automatic synchronization with AM systems | ● |
| Integrated power supply | ● |
| Recessed mounting in desktop | ● |
| Smooth surface and thin deactivation plate | ● |
| External notification box with key switch, Double Checker option | ○ |

Detection & deactivation distance

| | |
|---------------------------------------|-------------|
| Detection of DR label ¹ | Up to 10 cm |
| Deactivation of DR label ¹ | Up to 10 cm |

Specifications

| | |
|---|----------------------------------|
| Controller box (L / H / D) | 244 / 199 / 47 mm |
| Weight | 1.4 kg |
| Operating frequency | 58 kHz |
| Power supply (internal) | 115 VAC or 230 VAC |
| Ambient temperature | 0°C to 50°C |
| Relative humidity | 0% to 90%, non-condensing |
| Double sided fixation tape for recessed mounting (not included) | 3M™ VHB™ Acrylic Foam Tape 5608A |

● standard available

○ optional

- not available

¹ Fully coupled and depending on label quality and environment